


The Village
Shoppes of
North Reading
303 Main Street
North Reading, MA

Permit

No.	ISSUE	DATE
1	PERMIT SET	5/30/08

PROJECT #:
28112

DRAWING TITLE:
SECOND FLOOR POWER PLAN

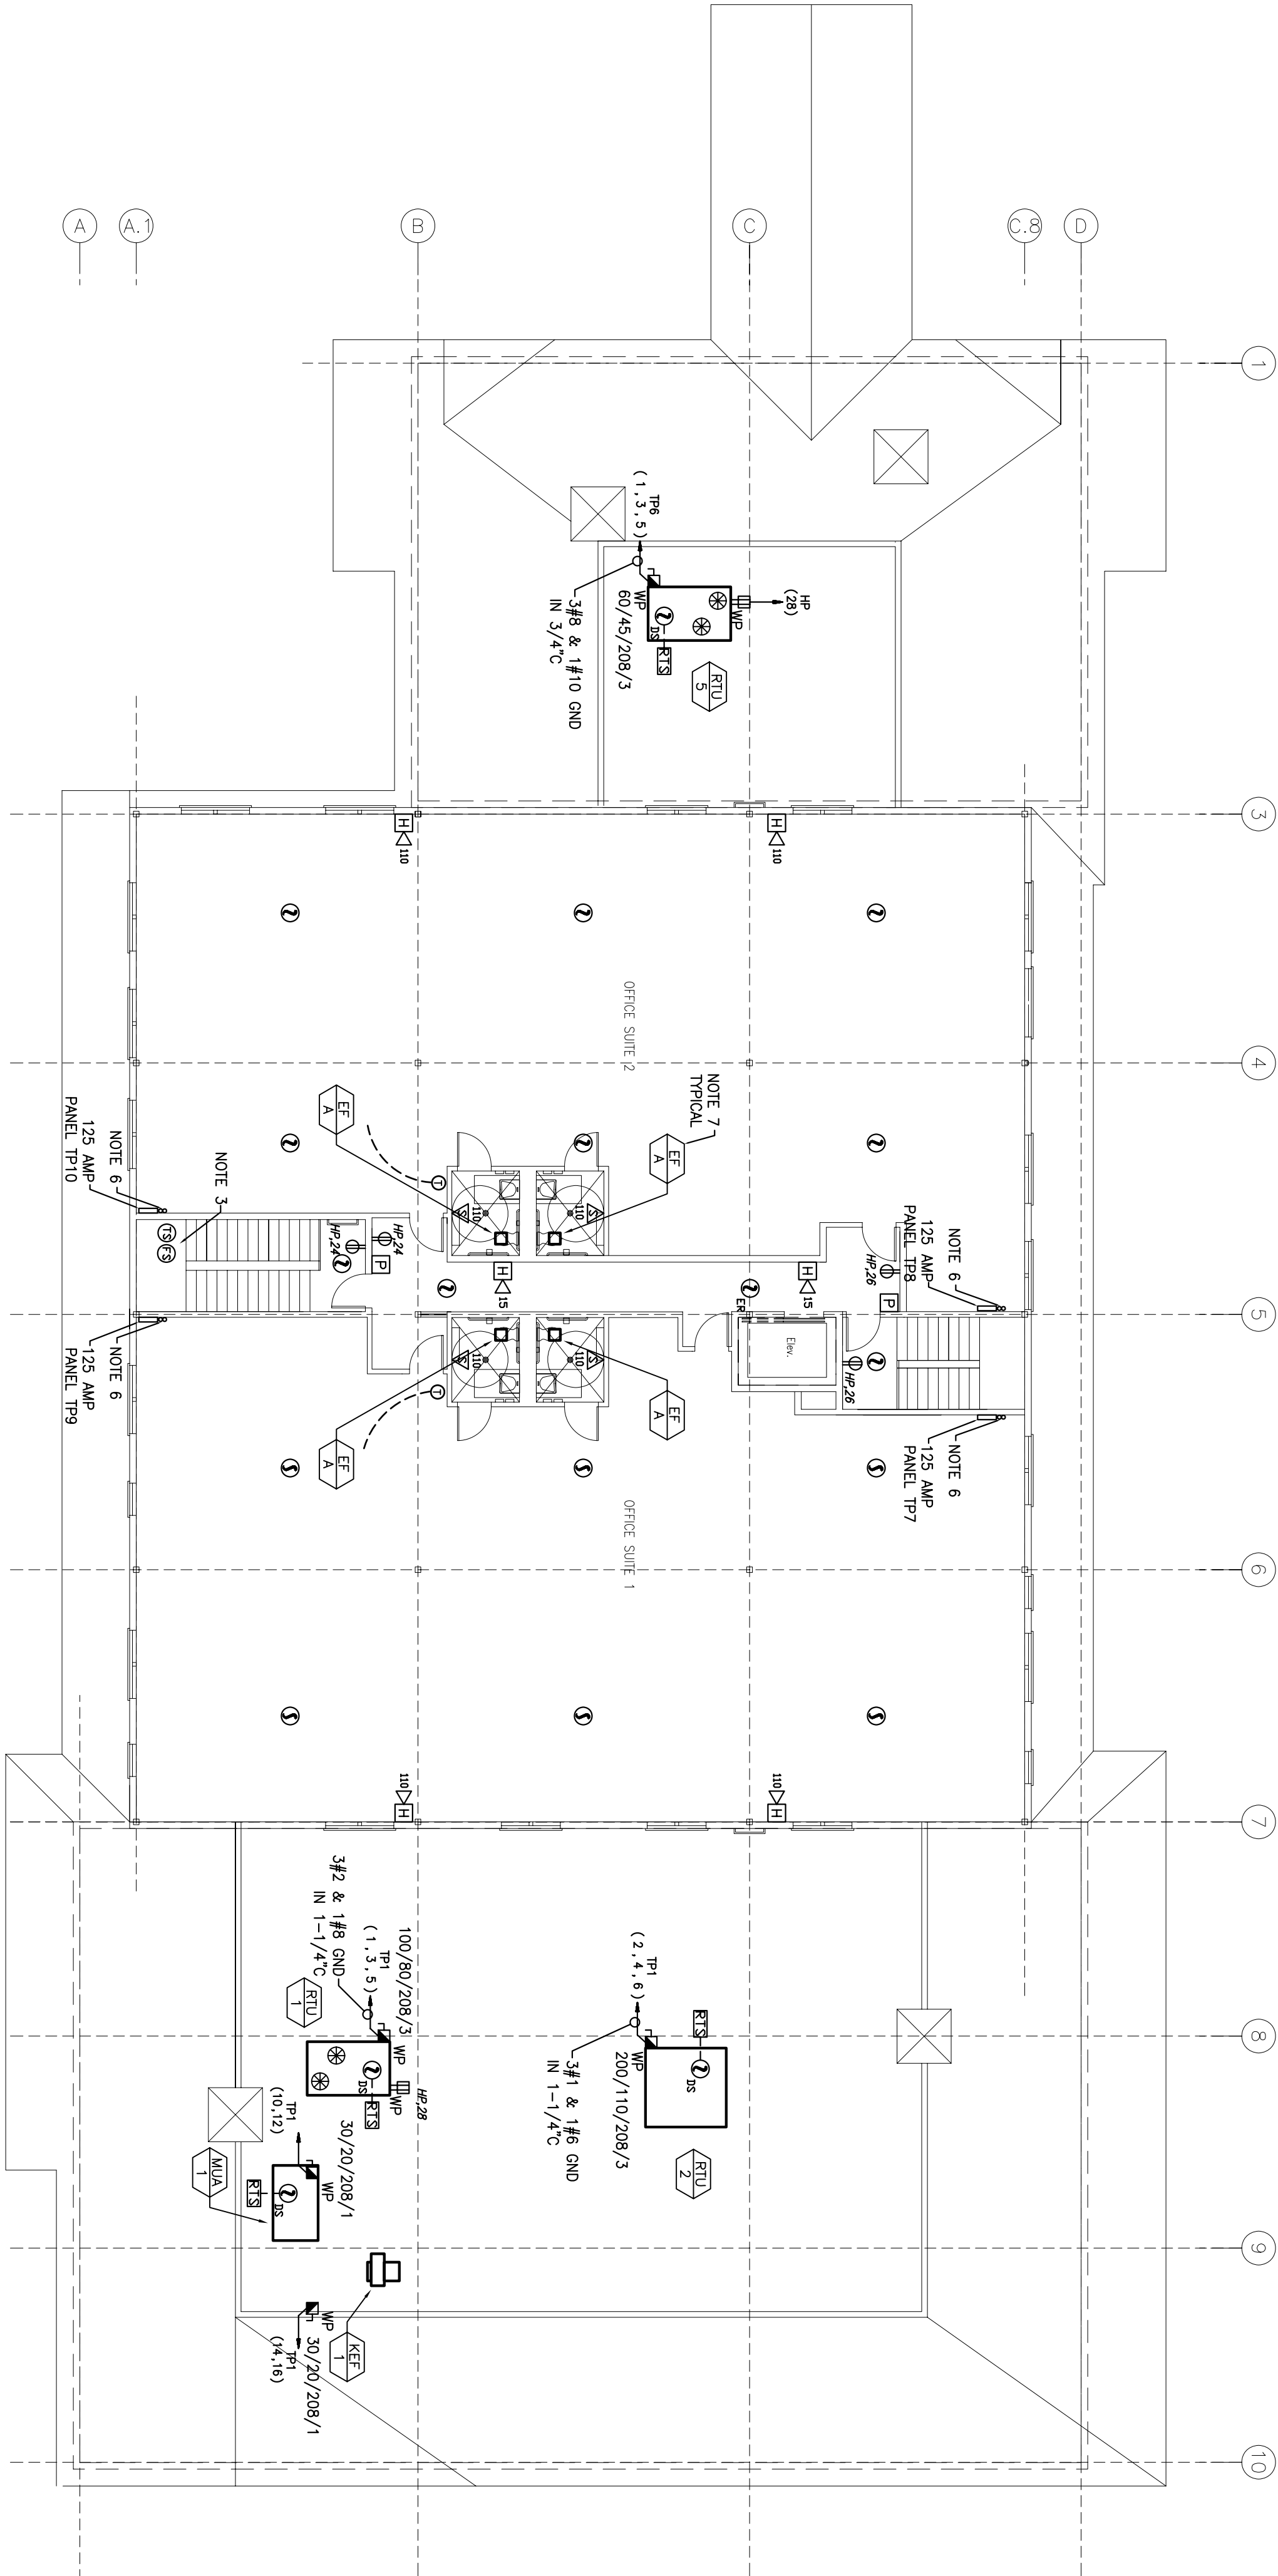

NOTES:

1. THE BUILDING SHALL HAVE A NEW DEDICATED FIRE ALARM CONTROL PANEL (FACP) LOCATED IN THE BASEMENT SERVING ALL THE UNITS. THIS FACP SHALL BE ADDRESSABLE TYPE.
2. ALL SMOKE DETECTORS SHALL BE SYSTEM TYPE CONNECTED TO THE NEW FACP.
3. NEW FLOW AND TAMPER SWITCHES SHALL BE CONNECTED TO THE NEW FACP. VERIFY LOCATION AND QUANTITY OF DEVICES WITH SPRINKLER CONTRACTOR PRIOR TO ROUGH-IN.
4. THE EC SHALL CONFIRM ALL ATTRIBUTES OF THE PROPOSED FIRE ALARM SYSTEM WITH THE LOCAL FIRE DEPARTMENT PRIOR TO STARTING CONSTRUCTION.
5. NOT USED
6. EC TO PROVIDE 2-2" FOR TELECOM AND FIRE ALARM SERVICES. THESE CONDUITS ARE TO ORIGINATE IN THE MAIN ELECTRICAL ROOM IN THE BASEMENT AND STUP UP IN THE BASEMENT. EC TO PROVIDE ELECTRICAL CONDUITS AND CONDUIT ALL CONDUIT AND ELECTRICAL PANEL LOCATIONS WITH ARCHITECT PRIOR TO ROUGH IN.
7. EXHAUST FAN EF-A WIRED THROUGH LIGHTING CIRCUIT. SEE LIGHTING PLAN E2.2